


	INTAKE	EXHAUST
ADVERTISED DURATION	304°	296°
ACTUAL CAM LIFT (in/mm)	.436"	.415"
ROCKER ARM RATIO	1:1	1:1
CENTERLINE	110°	118°
LOBE SEPERATION	114°	
DURATION AT 0.050" CAM	237°	229°
DURATION AT 0.050" VALVE	237°	229°
VALVE CLEARANCE	.012" / .305mm COLD	.014" / .355mm COLD
RECOMMENDED SPRING KIT	BC0250 (Single Spring)	

CAMSHAFT TIMING AT 0.050" VALVE LIFT	OPEN	CLOSES
	INTAKE	8.5° BTDC
EXHAUST	52° BBDC	-3° BTDC

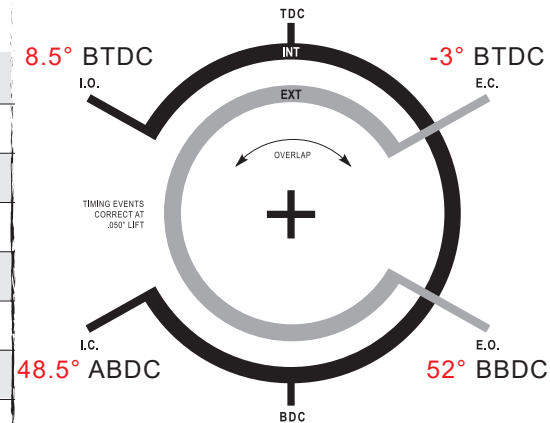

NOTES

Custom Spec
1.200" Bucket Diameter

BC does not recommend using synthetic oil during break-in or operation. Follow OEM manufacturer's torque sequence and specifications. Use liberal amount of aftermarket engine assembly lube during installation. Check follower or bucket surfaces for abnormal wear and/or scuffing. On initial start-up and break-in run engine at 1500-2500 rpm for 20 minutes. **Camshafts damaged by improper installation, excessive spring pressure or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.**

