


	INTAKE	EXHAUST
ADVERTISED DURATION	264°	264°
ACTUAL CAM LIFT (in/mm)	.344" / 8.74mm	.344" / 8.74mm
ROCKER ARM RATIO	1:1	1:1
CENTERLINE	110°	118°
LOBE SEPERATION	114°	
DURATION AT 0.050" CAM	218°	218°
DURATION AT 0.050" VALVE	218°	218°
VALVE CLEARANCE	.008" / .203mm COLD	.010" / .254mm COLD
RECOMMENDED SPRING KIT	BC0300 (Single Spring) or BC0300HD (Single Spring)	

CAMSHAFT TIMING AT 0.050" VALVE LIFT	OPEN	CLOSES
	INTAKE	1° ATDC
EXHAUST	47° BBDC	9° BTDC

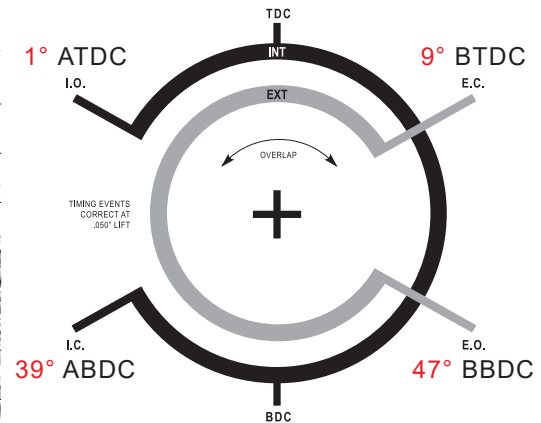

### NOTES

BUCKET DIAMETER: 1.200"

BC does not recommend using synthetic oil during break-in or operation. Follow OEM manufacturer's torque sequence and specifications. Use liberal amount of aftermarket engine assembly lube during installation. Check follower or bucket surfaces for abnormal wear and/or scuffing. On initial start-up and break-in run engine at 1500-2500 rpm for 20 minutes. **Camshafts damaged by improper installation, excessive spring pressure or retainers contacting valve guides or seals are void from warranty. Not legal for sale or use on emission controlled motor vehicles.**

